

Proximity Switch Tester



Application

This unit allows the user to evaluate the clamp's internal electrical circuit. It will test the clamp arm position and proximity switch function without removing clamps from the press.


Description

Hand held self contained tester operates with standard alkaline batteries and includes a 16 foot, 5 conductor connection cable. The testers HCR-HET-3W5C and HCR-HET-2W4C-SS has easy to read LED indicators to show the proximity switch operation at clamp arm position; Clamp, Unclamp and Changeover.

The tester HCR-HET-2W4C-SW for Swing Clamps shows clamp and unclamp.

Operation

Plug into the connection on the clamp and hydraulically or manually activate the clamp to test the proximity switch.

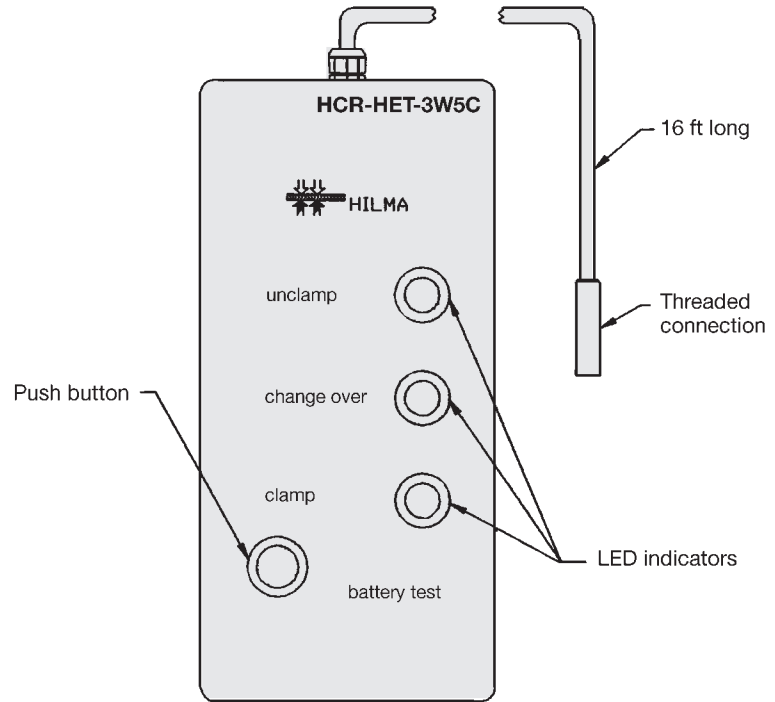

Enclosure
2 x 2 $\frac{3}{8}$ x 4 $\frac{5}{8}$

HCR-HET-3W5C shown

PART NO.	APPLICATION
HCR-HET-3W5C	For clamps with 3 wire prox. switches
HCR-HET-2W4C-SW	For Swing Clamps with 2 wire prox. switches
HCR-HET-2W4C-SS	For Swing Sink Clamps with 2 wire prox. switches